

Foot valve S4



Symbol photo

General:

- Material: PVC-U / PP
- Strainer: PP
- Sealing material: EPDM / FPM
- Dimensions: DN10 – DN80
d16 – d110
3/8" – 4"

Connector types

PVC

- Solvent socket DIN / ASTM / JIS
- Solvent spigot DIN
- Threaded socket BSP
- PE fusion spigot DIN

PP

- Fusions socket DIN
- Fusion spigot DIN
- Threaded socket BSP

Further connector types on request

Operating pressure:

DN10 d16 d3/8" – DN50 d63 2"	PN16/10
DN65 d75 d2 1/2"	PN16/8
DN80 d90 d3"	PN10/6
DN80 d110 d4"	PN6


Technical features:

- Maintenance free operation over a long working life
- Service friendliness
- Radial installation or removal
- Quick and exact closing and opening
- Opening pressure 0,025 bar


This document does not constitute a guarantee, it is for initial information purposes only. The product range is continually upgraded, the designs and types therefore only reflect the state of the art at the time of printing.
Subject to technical modifications!

Foot valve S4


Dimensions:

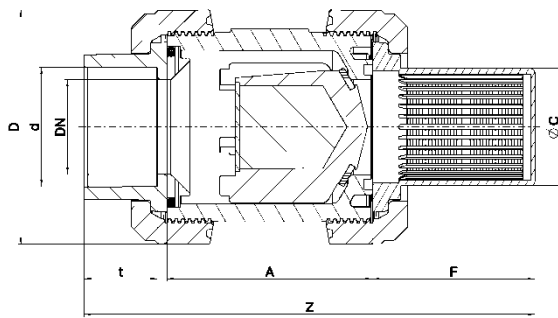

foot valve with solvent socket

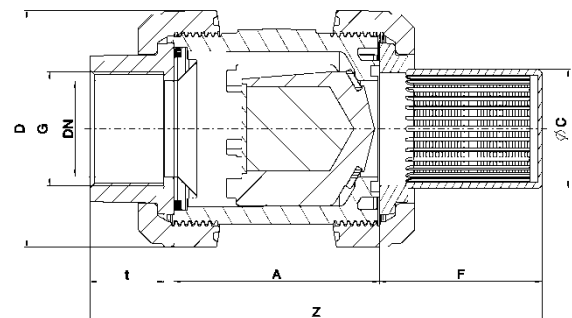

foot valve with threaded socket

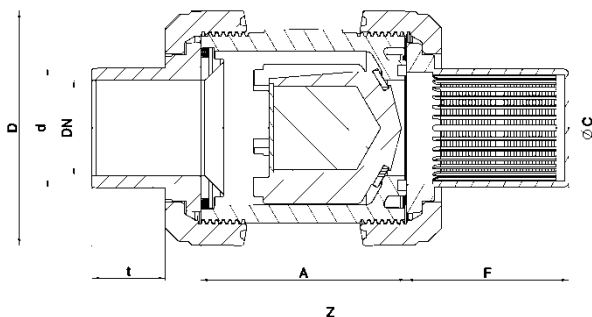

foot valve with solvent spigot

PVC

Connector types

PVC solvent socket / threaded socket / solvent spigot

DN	10	15	20	25	32	40	50	65	80	80
d	16	20	25	32	40	50	63	75	90	110
G ¹ TSO	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	-
A	62	62	70	74	84	95	109	137	163	163
C	5,8	5,8	6	6,1	7	7,5	8,5	10,5	13,6	13,6
D	53	53	63	70	85	101	124,5	155	188	188
F	49	49	56	58	72	85	85	108	129	129
t ² SSO	16,5	16,5	19,5	22,5	26,5	31,5	38,5	45	55,5	64
t ³ SSP	17	17	20	22,5	26,5	31,5	38,5	45	52	64,5
Z ¹ TSO ² SSO	130	130	149	157	186	216	238	295	357	361
Z ³ SSP	137,5	142,5	164	172,5	201,5	230	251,5	319,5	360,5	381,5
PN	16	16	16	16	16	16	16	16	10	6

dimensions in mm


¹TSO = threaded socket

²SSO = solvent socket


³SSP = Klebestutzen

- = nicht realisiert


Foot valve S4

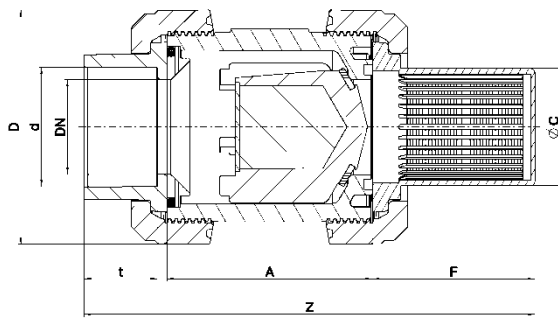

foot valve with fusion socket

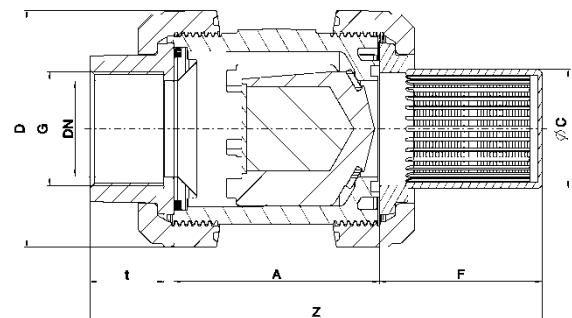

foot valve with threaded socket

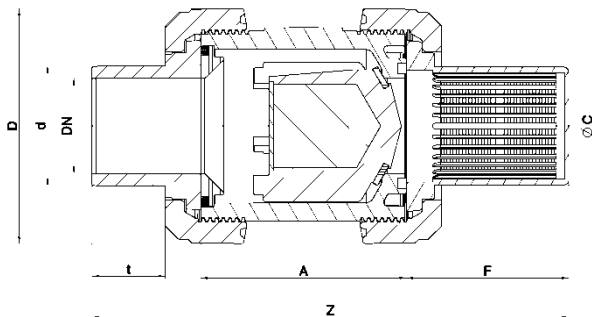

Foot valve with fusion spigot

PP

Connector types

PP fusion socket / fusion spigot / threaded socket

DN	10	15	20	25	32	40	50	65	80	80
d	16	20	25	32	40	50	63	75	90	110
G ¹ TSO	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	-
A	62	62	69	73	83	94	108	133	160	160
C	5,8	5,8	6	6,1	7	7,5	8,5	10,5	13,6	13,6
D	53	53	64	71	84,5	100	120,5	155	187	187
F	49	49	56	58	72	85	85	108	129	129
t ² FSO	14,5	16	17,5	19,5	22	25,5	29	34,5	38,5	42
t ³ FSP	13	14	15,5	18,5	20,5	23,5	28	31	36	38
Z ¹ TSO ² FSO	130	130	147	156	194	214	236	290	353	357
Z ³ FSP	137	142	162	170	209	228	249	313	356	365
PN	10	10	10	10	10	10	10	8	6	6

¹ TSO = threaded socket
- = not realised

² FSO = fusion socket


³ FSP = Fusion spigot

Dimensions in mm

Foot valve S4

Exploded drawing:


01. Body
02. Flat gasket
03. Cone
04. Thrust collar
05. O-Ring
06. Connector types
 - Solvent socket
 - Solvent spigot
 - threaded socket
 - fusion socket
 - fusion spigot
07. Union nut
08. Strainer

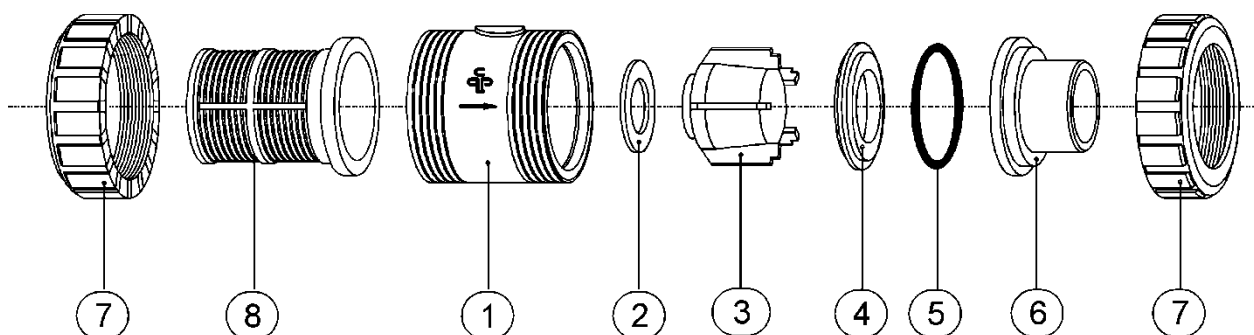

Diagrams

Pressure – Temperature – Diagram

PVC

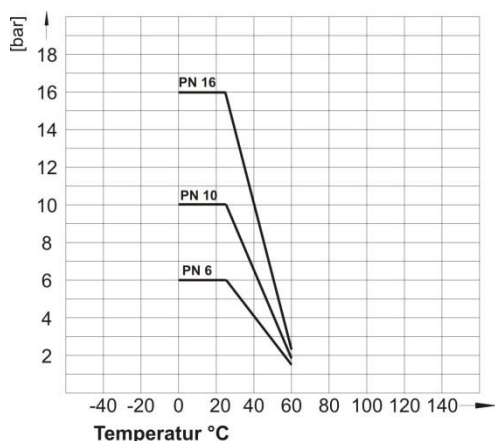

PP

